

[Ibérica de Iluminación]

WWW.IBERICADEILUMINACION.ES

WWW.IBERIANLEDGROUP.COM



PROYECTOR CORE MAX PHILIPS XITANIUM



IK10



IP65

REGULABLE 1-10V/DALI

DISPONIBLE EN
1200W

INFORMACIÓN DEL PRODUCTO

Luminaria LED PHILIPS XITANIUM es fiable, segura y asequible. Es una gama nueva que se ha mejorado para dar el mayor rendimiento y están diseñadas para reemplazar las luminarias de halogenuro, vapor de sodio, etc antiguas. Se ha mejorado para alcanzar una eficacia mucho más alta, teniendo 320lm/w. Alcanzan un rango de lúmenes de 264.000Lum. Además de llevar el driver Philips Xitanium, utiliza diodos SM5050 de Bridgelux.

APLICACIÓN

- ESTE PRODUCTO VIENE DESMONTADO (Opción de montaje en almacén).
- Es un producto versátil y fácil de transportar.
- Diversas aplicaciones: campos de panel, campos de fútbol, torres de gran altura, etc.

HOUSING

- Está fabricado en ALUMINIO y PC.
- Opción de regulación por 1-10V o Dali.
- Rango de temperatura: -20°C ~ +55°C.

MONTAJE

- Anclaje en pared o en báculo.
- Colocación en soporte para varias luminarias a la vez.

bridgelux®

PHILIPS

Xitanium

LED driver

MONTAJE ÓPTICO Y LED

- Un producto de alto rendimiento que utiliza chips LED de Bridgelux y Driver Philips Xitanium, que ofrece una confiabilidad excepcional.
- Versión **disponible en 5000k con un CRI de 70.**
- Ángulo de apertura CONSULTAR.
- Tiene una vida estimada de 50.000H.



ELÉCTRICA

- 85-265V / 50-60Hz
- Factor de potencia: 0.95
- Clase energética A



Xitanium LITE Prog LED drivers Independent

PHILIPS

Xitanium
LED driver

- SimpleSet®, wireless configuration interface
- High surge protection
- Long lifetime and robust protection against moisture, vibration and temperature
- Configurable operating windows(AOC)
- External control interface (1-10V) available
- Digital Configuration Interface (DCI) via MultiOne Interface
- Autonomous or Fixed time based (FTBD) dimming via integrated 5-step DynaDimmer
- Programmable Constant Light Output (CLO)
- Integrated Driver Temperature protection



PROYECTOR 1200W PHILIPS XITANIUM DRIVER

REFERENCIA: MDPHL1200W

Potencia nominal: 1.200W

Tensión Nominal: 85-305v.

Temperatura de Luz: 5000K

CRI -Índice Reproducción Cromática: 70

Material de Construcción: Aluminio + PC

Clase Energética: A

Luminosidad-Lm: 264.000Lm

Tipo de LEDs: SMD 5050/8W/24V BRIDGELUX CHIP

Angulo de Apertura (º): A CONSULTAR

Eficacia Diodo LED (Lm/W): 320Lm/W

Eficacia luminosa (Lm/W): 220Lm/W

Dimable: 1-10V / DALI

Certificados: CE-RoSH

Grado de IP: IP65

Vida Estimada Diodo LED (H): 50.000

Factor de Potencia (PF): 0.95

Frecuencia de Trabajo (Hz): 47/63Hz

Rango Temperatura (ºC): -20º+55º

Ciclos de Encendidos: 100.000

Tiempo de Arranque (s): 0,2s

Medidas: 565x405x165mm

Protección impacto (IK): IK10

Driver incluido: PHILIPS XITANIUM LITE Prog LED drivers Independent Xi LP 320W
Programmable 5 YEARS 0.7-2.1ª S1 WL AUX I230

Garantía años: 5

FICHA FOTOMÉTRICA



www.inventfine.cn
Tel: 86-571-88091262
Fax: 86-571-88262100

Lightsource Test Report

Product Information

Product Number: 132

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3274$ $y=0.3359$ $u(u')=0.2054$ $v=0.3161$ $v'=0.4741$

CCT: $T_c=5734K$ ($duv=-0.00033$)

Color Ratio: $R=0.131$ $G=0.836$ $B=0.033$

Peak Wavelength: 448.1nm

Half Bandwidth: 16.4nm

Dominant Wavelength: 497.5nm

Color Purity: 0.019

CRI: $R_a=71.0$

TM30: $R_f=70$, $R_g=95$

$R1=70$ $R2=75$ $R3=77$ $R4=73$

$R5=71$ $R6=65$ $R7=80$ $R8=58$

$R9=-32$ $R10=39$ $R11=70$ $R12=39$

$R13=70$ $R14=87$ $R15=65$

Color Quality Scale: $Q_a=68.6$, $Q_f=67.2$, $Q_p=72.7$, $Q_g=90.2$


$Q5=66$ $Q6=71$ $Q7=76$ $Q8=85$

$Q1=79$ $Q2=92$ $Q3=58$ $Q4=53$

$Q5=66$ $Q6=71$ $Q7=76$ $Q8=85$

$Q9=88$ $Q10=70$ $Q11=64$ $Q12=65$

$Q13=69$ $Q14=57$ $Q15=66$

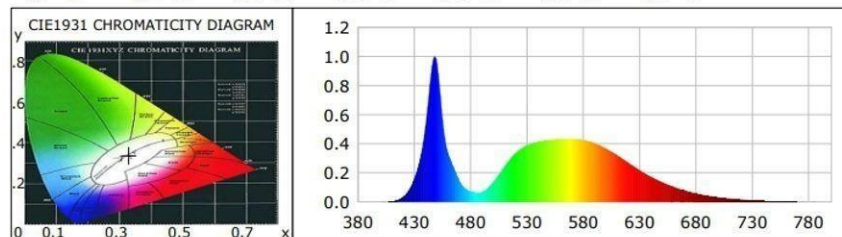

Photometric Parameters

Luminous Flux: 68135.88 lm

Efficiency: 228.41 lm/W

Radiant Power: 205.265 W

EEI: 0.06

Energy Efficiency Class: A++ (EU 874-2012)

Electric Parameters

Voltage: 229.80V

Current: 1.3140A

Power: 298.30W

Power Factor: 0.9880

Frequency: 49.99Hz

Test Information

Scan Range: 380~800:1nm

Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 1.50m, 4T


Max of Signal: 46406 (2378)

CCD Integration Time: 4.69 ms

IES TM-30-18 Color Rendition Report

Product Information




Product Number: 132

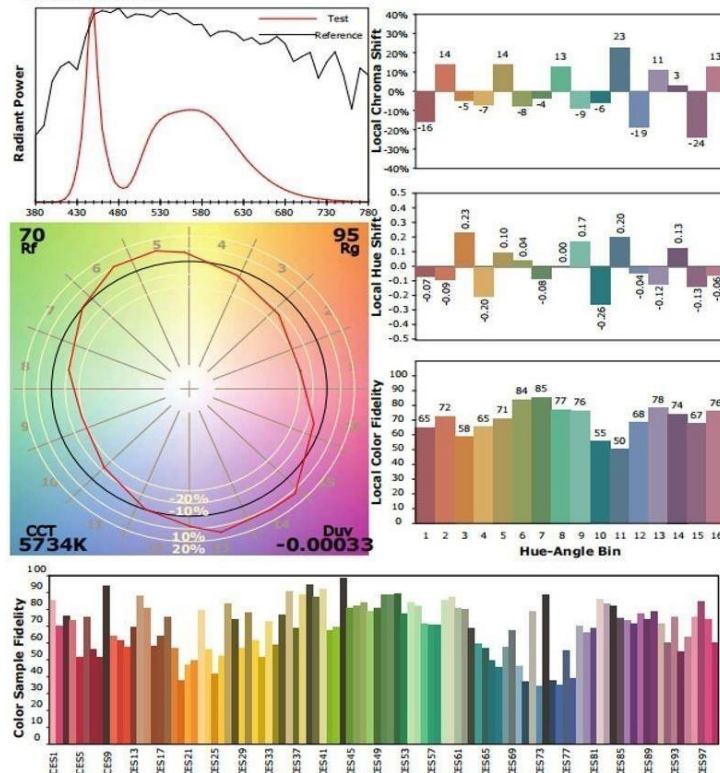

Condition: $T_x:21.6^{\circ}C$, $T_t:22.1^{\circ}C$, R.H.:60%
Test Lab:
Operator:

Test Device: Inventfine CMS-2S (Plus)
Test Time: 2023-02-09 11:53:54
Inspector:

MEDIDAS

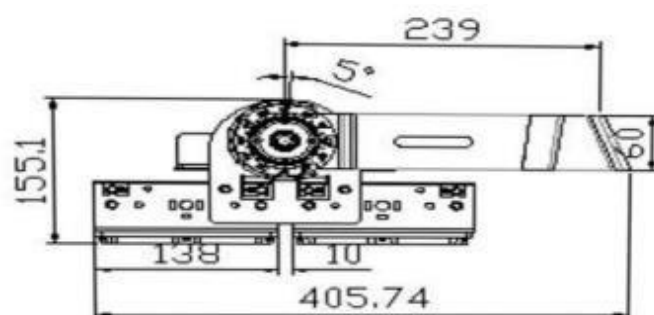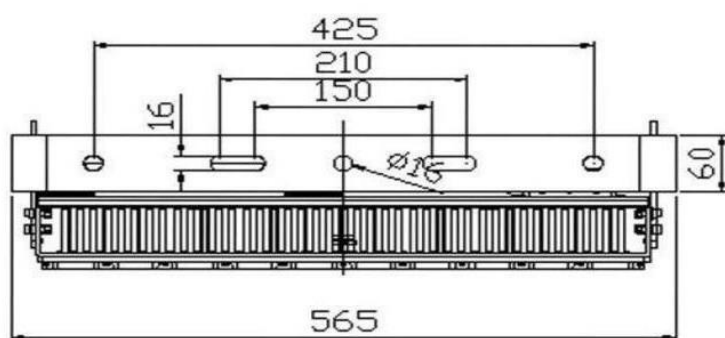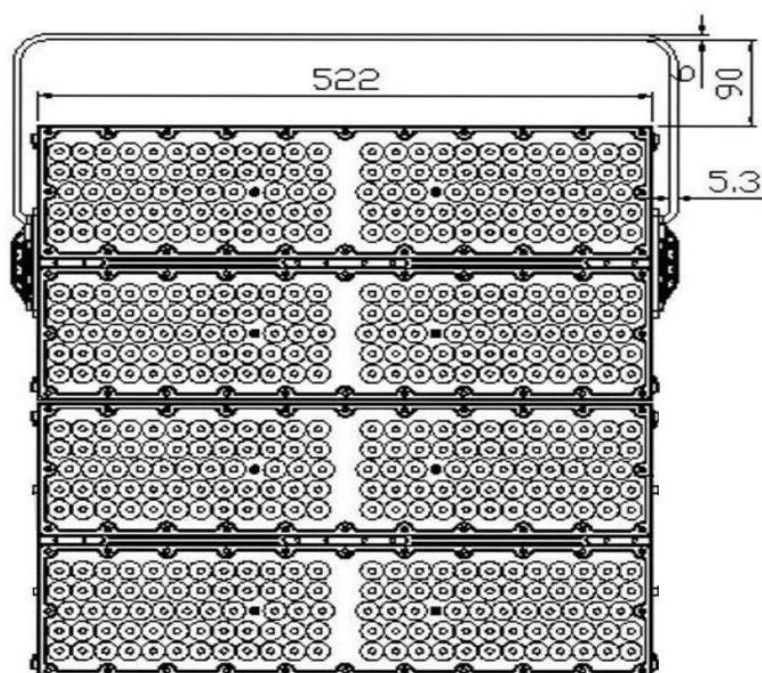

PHILIPS

Xitanium

LED driver



Datasheet

Xitanium LITE Prog LED drivers Independent

Xi LP 320W 0.7-2.1A S1 WL AUX I230

9290 028 82780

Philips Xitanium Lite Programmable LED drivers are value engineered to deliver a carefully selected feature set and high-end performance, making it a preferred choice for many outdoor applications. The portfolio offers high flexibility with a customizable operating window, enabling differentiation in LED lighting designs via system tuning and being prepared for LED efficacy upgrades.

In this product family Philips introduces new drivers in a stretched form factor with a balanced feature set, which offer high value for both OEM customers and end-users. The products can replace the existing programmable outdoor LED drivers and will bring significant improvement in programming, assembly into a luminaire and electrical performance. One of the key features is SimpleSet®, an easy and fast way to configure the driver without the need to power the driver.

Benefits

- Ultimate robustness, offering peace of mind and lower maintenance costs
- Long lifetime and high survival rate
- Energy savings through high efficiency
- Balanced configurable feature set covering the most common applications
- Superior thermal management
- Consistent waterproof performance through the lifecycle
- Easy to design-in, configure and install for Class I applications

Features

- SimpleSet®, wireless configuration interface
- High surge protection
- Long lifetime and robust protection against moisture, vibration and temperature
- Configurable operating windows(AOC)
- External control interface (1-10V) available
- Digital Configuration Interface (DCI) via MultiOne Interface
- Autonomous or Fixed time based (FTBD) dimming via integrated 5-step DynaDimmer
- Programmable Constant Light Output (CLO)
- Integrated Driver Temperature protection

Application

- Residential areas
- Road and street lighting
- Area and flood lighting
- Tunnel lighting
- High-bay lighting

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	202...254	V _{ac}	Performance range
Rated input voltage	230	V _{ac}	
Rated input frequency range	47...63	Hz	Performance range
Rated input current	1.52	A	@ rated output power @ rated input voltage
Max. input current	1.8	A	@ rated output power @ minimum performance input voltage
Rated input power	350	W	@ rated output power @ rated input voltage
Power factor	0.95		@ rated output power @ rated input voltage
Total harmonic distortion	10	%	@ rated output power @ rated input voltage
Efficiency	92.5	%	@ rated output power @ rated input voltage @ max. U _{out}
Input voltage AC range	85...305	V _{ac}	Operational range
Input frequency AC range	45...66	Hz	Operational range
Standby Power	0.39	W	
Isolation input to output	Basic		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	114...228	V _{dc}	
Output voltage max.	300	V	Maximum voltage at open load
Output current	0.7...2.1	A	
Output current min programmable	700	mA	
Output current min dimming	140	mA	
Output current tolerance ±	5	%	
Output current ripple LF	≤ 4	%	Ripple = peak / average @ ≤1KHz
Output current ripple HF	≤ 4	%	Ripple = peak / average @ >1KHz
Output P _{st} ^{LM}	≤ 0.14		In entire operating window
Output SVM	≤ 0.07		In entire operating window
Output power	16...320	W	

Electrical data controls input

Specification item	Value	Unit	Condition
Control method	1-10V, Dynadimmer		Output current amplitude dimming
Dimming range	10...100	%	See 1-10V dimming graph. Dim to off.
Isolation controls input to output	Double		acc. IEC61347-1

Wiring and Connections


Specification item	Value	Unit	Type
Input wire cross-section	1	mm ²	3x 1.0mm ² stranded wires, waterproof cable
Output wire cross-section	1	mm ²	2x 1.0mm ² stranded wires, waterproof cable
Control wire cross-section	0.33	mm ²	3x 0.33mm ² stranded wires, waterproof cable
Maximum cable length	2	m	Total length of wiring including LED module, one way

Insulation

Insulation per IEC61347-1	Input	Output	1-10V&Aux	Ground
Input		Basic	Double	Basic
Output	Basic		Double	Basic
1-10V&Aux	Double	Double		Basic
Ground	Basic	Basic	Basic	

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	230	mm	± 2
Mounting hole distance (A2)	218	mm	± 2
Length (A3)	211	mm	± 2
Width (B1)	90	mm	± 1
Width (B2)	70	mm	± 0.3
Width (B3)	50	mm	± 0.3
Height (C1)	40	mm	± 1
Mounting hole diameter (D1)	4	mm	± 0.3
Mounting hole diameter (D2)	4	mm	± 0.3
Input cable length (E1)	450	mm	± 30
Output cable length (E2)	450	mm	± 30
Control cable length (E3)	300	mm	± 30
Weight	1450	gram	
Housing color	black		

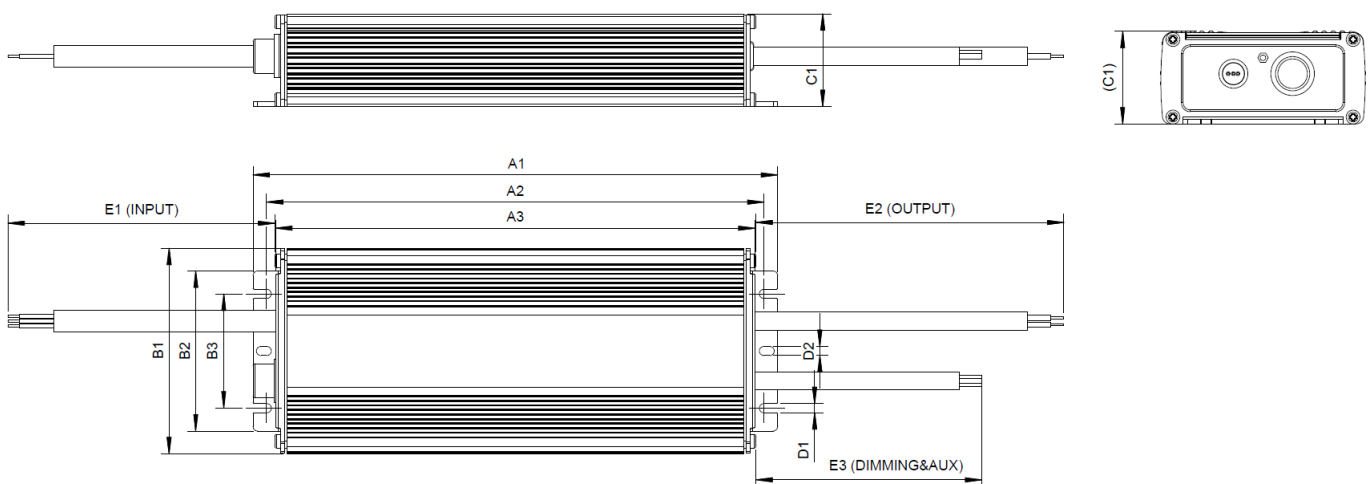

Logistical data


Specification item	Value
Product name	Xi LP 320W 0.7-2.1A S1 WL AUX I230
EOC	692234194422200
Logistic code 12NC	9290 028 82780
EAN1 (GTIN)	6922341944222
EAN3 (box)	06922341944239
Pieces per box	6

Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+55	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-max	85	°C	Maximum temperature measured at T _{case} -point
Tcase-life	75	°C	Measured at T _{case} -point
Maximum housing temperature	130	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at Tcase-point is Tcase-max. Maximum failures = 10%

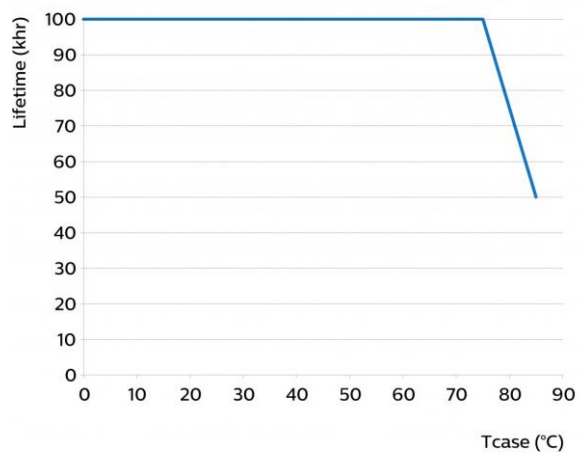

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+80	°C	
Relative humidity	5...95	%	Non-condensing

Programmable features


Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	SimpleSet	1400 mA	
Adjustable Light Output (ALO)	Yes		
Constant Light Output (CLO)	Yes		
1-10V	Yes		Default: 1-10V. Optional: 0-10V
Dynadimmer	Yes	—	

Features

Specification item	Value		Condition
Open load protection	Yes		Automatic recovering
Short circuit protection	Yes		Automatic recovering
Over power protection	Yes		Automatic recovering
Hot wiring	No		
Suitable for fixtures with protection class	I		per IEC60598
Overtemperature protection	Yes		Automatic recovering
Diagnostics	Yes		
+12V Auxiliary Power Supply	Yes		Max current: 200mA

Inrush current

Specification item	Value	Unit	Condition
Inrush current I_{peak}	58	A	Input voltage 230V
Inrush current T_{width}	444	µs	Input voltage 230V, measured at 50% I_{peak}
Drivers / MCB 16A type B	≤ 3	pcs	Indicative value

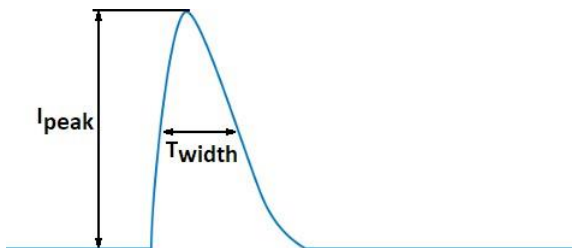

MCB	Rating	Relative number of LED drivers
B	4A	25%
B	6A	40%
B	10A	63%
B	13A	81%
B	16A	100% (stated in datasheet)
B	20A	125%
B	25A	156%
B	32A	200%
B	40A	250%
C	4A	42%
C	6A	63%
C	10A	104%
C	13A	135%
C	16A	170%
C	20A	208%
C	25A	260%
C	32A	340%
C	40A	415%

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current (ins. Class I)	0.7	mA rms	Acc. IEC60598-1. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	10	kV	Acc. IEC61000-4-5. 12 Ohm 1.2/50us,8/20us

Application Info


Specification item	Value
Approval marks	CB / CCC / CE / ENEC / RCM / UKCA
Ingress Protection classification (IP)	67
Application	Outdoor
Mounting Type	Independent

Graphs


Operating window

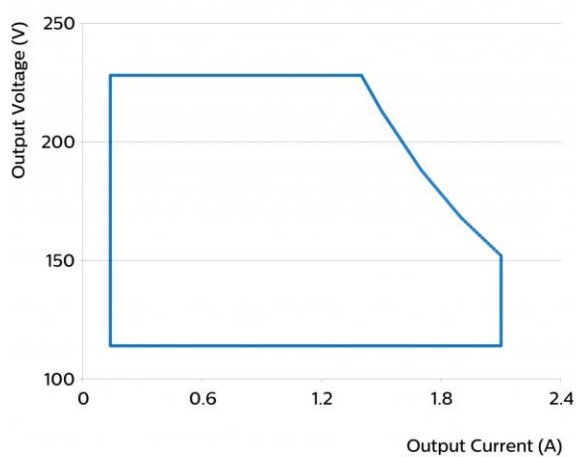


Thermal Guard

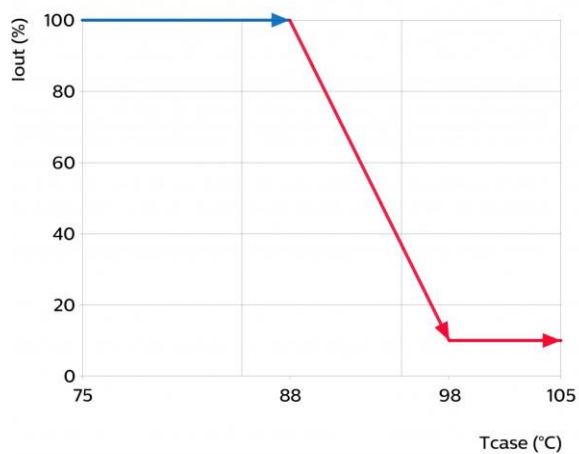


Mains Guard

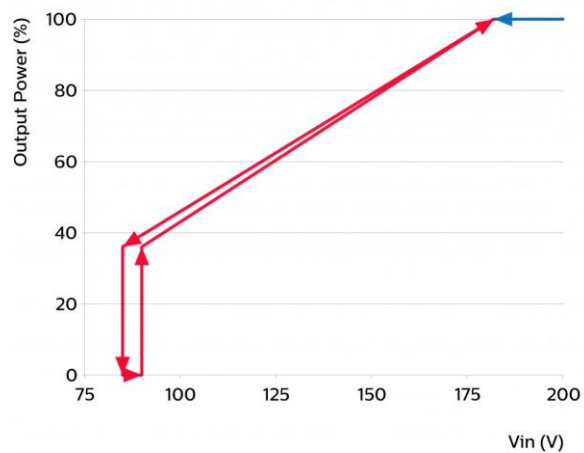


Power factor versus output power

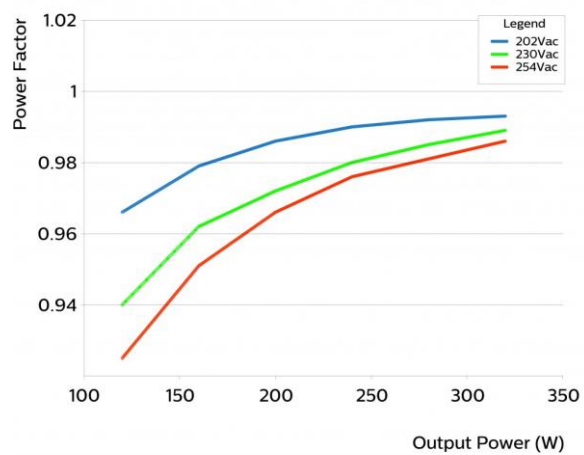


Efficiency versus output power

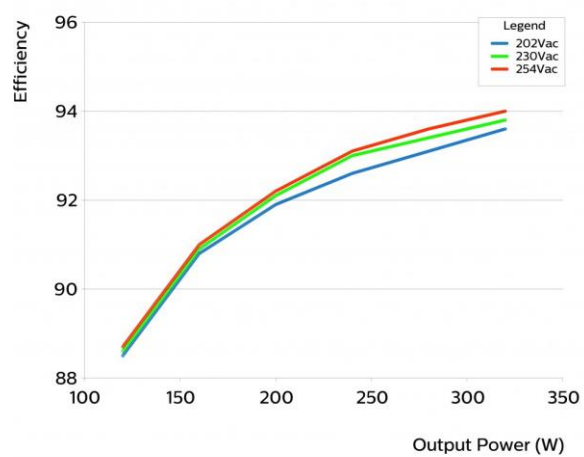

THD versus output power

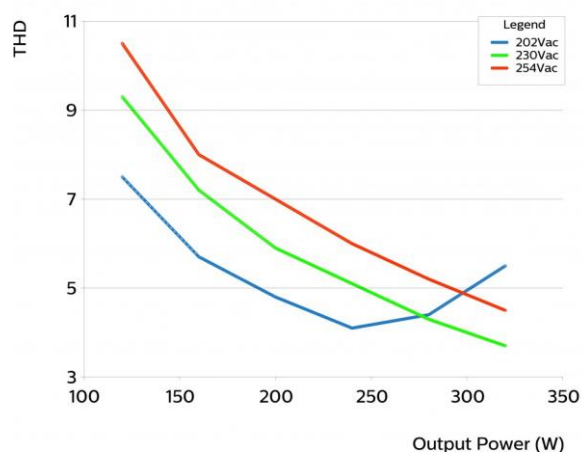

I_{out} as function of 1-10V interface

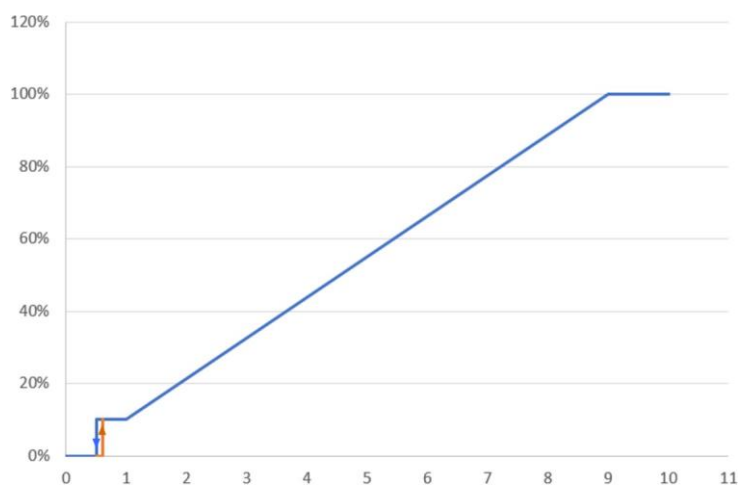


©2021 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.
Date of release: July 5, 2021 v1

www.philips.com/oem

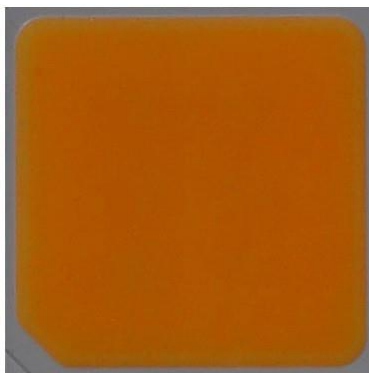

Bridgelux® SMD 5050 5W 9V

Product Data Sheet DS63

Introduction

SMD 5050



The Bridgelux SMD 5050 high power LED is hot-color targeted which ensures that the LEDs fall within their specified color bin at the typical application conditions of 85°C. With its broad lumen coverage and wide range of CCT options, the SMD 5050 provides unparalleled design-in flexibility for indoor and outdoor lighting applications. The SMD 5050 is ideal as a drop in replacement for emitters with an industry standard 5.0mm x 5.0mm footprint.

Features

- Industry-standard 5050 footprint
- 3 bin color control enables tight color control
- Hot-color targeting ensures that color is within the ANSI bin at the typical application conditions of 85°C
- Enables 3- and 5-step MacAdam ellipse custom binning kits
- RoHS compliant and lead free
- Multiple CCT configurations for a wide range of lighting applications

Benefits


- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform consistent white light
- Reliable and constant white point
- Environmentally friendly, complies with standards
- Design flexibility

Contents

Product Feature Map	2
Product Nomenclature	2
Product Test Conditions	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	4
Electrical Characteristics	6
Absolute Maximum Ratings	7
Product Bin Definitions	8
Performance Curves	11
Typical Radiation Pattern	14
Typical Color Spectrum	15
Mechanical Dimensions	16
Reliability	17
Reflowing Characteristics	18
Packaging	19
Design Resources	21
Precautions	21
Disclaimers	21
About Bridgelux	22


Product Feature Map

Bridgelux SMD LED products come in industry standard package sizes and follow ANSI binning standards. These LEDs are optimized for cost and performance, helping to ensure highly competitive system lumen per dollar performance while addressing the stringent efficacy and reliability standards required for modern lighting applications.

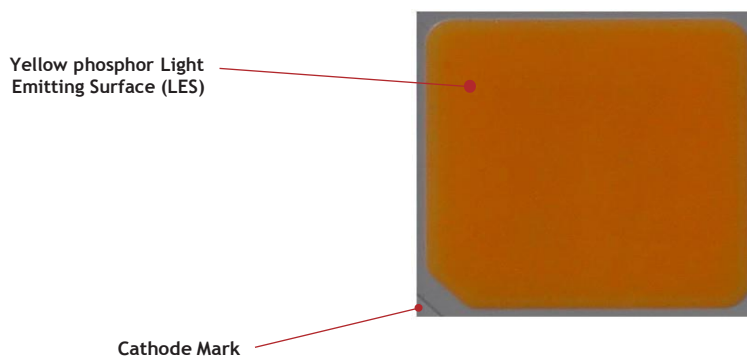

Product Nomenclature

The part number designation for Bridgelux SMD 5050 is explained as follows:

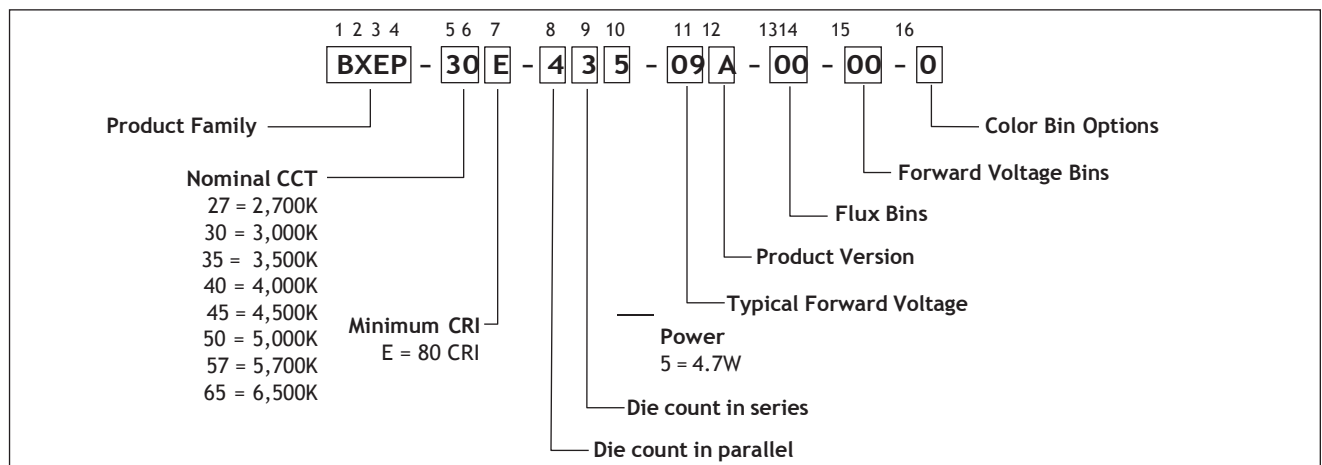

Product Test Conditions

Bridgelux SMD 5050 LEDs are tested and binned with a 10ms pulse of 500mA at T_j (junction temperature) = T_{sp} (solder point temperature) = 25°C. Forward voltage and luminous flux are binned at a $T_j = T_{sp} = 25^\circ\text{C}$, while color is hot targeted at a T_{sp} of 85°C.

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 500mA ($T_j = T_{sp} = 25^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ⁵	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEP-27E-435-09A-00-00-0	2700	80	500	8.5	9.3	10.2	579	4.7	125
BXEP-30E-435-09A-00-00-0	3000	80	500	8.5	9.3	10.2	600	4.7	129
BXEP-35E-435-09A-00-00-0	3500	80	500	8.5	9.3	10.2	614	4.7	132
BXEP-40E-435-09A-00-00-0	4000	80	500	8.5	9.3	10.2	626	4.7	135
BXEP-45E-435-09A-00-00-0	4500	80	500	8.5	9.3	10.2	629	4.7	135
BXEP-50E-435-09A-00-00-0	5000	80	500	8.5	9.3	10.2	629	4.7	135
BXEP-57E-435-09A-00-00-0	5700	80	500	8.5	9.3	10.2	629	4.7	135
BXEP-65E-435-09A-00-00-0	6500	80	500	8.5	9.3	10.2	624	4.7	134

Table 2: Selection Guide, Stabilized DC Performance ($T_{sp} = 85^\circ\text{C}$)^{7,8}

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ⁵ (V)			Typical DC Flux (lm) ⁵	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEP-27E-435-09A-00-00-0	2700	80	500	8.2	9.0	9.9	504	4.5	111
BXEP-30E-435-09A-00-00-0	3000	80	500	8.2	9.0	9.9	522	4.5	116
BXEP-35E-435-09A-00-00-0	3500	80	500	8.2	9.0	9.9	534	4.5	118
BXEP-40E-435-09A-00-00-0	4000	80	500	8.2	9.0	9.9	545	4.5	121
BXEP-45E-435-09A-00-00-0	4500	80	500	8.2	9.0	9.9	547	4.5	121
BXEP-50E-435-09A-00-00-0	5000	80	500	8.2	9.0	9.9	547	4.5	121
BXEP-57E-435-09A-00-00-0	5700	80	500	8.2	9.0	9.9	547	4.5	121
BXEP-65E-435-09A-00-00-0	6500	80	500	8.2	9.0	9.9	543	4.5	120

Notes for Table 1 & 2:

- The last 7 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-00-0" denotes the full distribution of flux, forward voltage, and 7 SDCM color.
Example: BXEP-30E-435-09A-00-00-0 refers to the full distribution of flux, forward voltage, and color within a 3000K 7-step ANSI standard chromaticity region with a minimum of 80CRI, 4x3 die configuration, 4.7w power, 9.3V typical forward voltage.
- Product CCT is hot targeted at $T_{sp} = 85^\circ\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_j = T_{sp} = 25^\circ\text{C}$.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the SMD 5050.
- Refer to Table 6 and Table 7 for Bridgelux SMD 5050 Luminous Flux Binning and Forward Voltage Binning information.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED emitter mounted onto a heat sink with thermal interface material and the solder point temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Performance at Commonly Used Drive Currents

SMD 5050 LEDs are tested to the specifications shown using the nominal drive currents in Table 1. SMD 5050 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative luminous flux vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _{sp} = 25° C (V)	Typical Power T _{sp} = 25° C (W)	Typical Pulsed Flux ² T _{cn} = 25° C (lm)	Typical DC Flux ³ T _{sp} = 85° C (lm)	Typical Efficacy T _{sp} = 25° C (lm/W)
BXEP-27E-435-09A-00-00-0	80	125	8.2	1.0	161	145	157
		250	8.6	2.2	311	277	144
		375	9.0	3.4	451	396	134
		500	9.3	4.7	579	504	125
		800	10.1	8.1	846	698	105
BXEP-30E-435-09A-00-00-0	80	125	8.2	1.0	167	150	163
		250	8.6	2.2	323	287	150
		375	9.0	3.4	467	410	138
		500	9.3	4.7	600	522	129
		800	10.1	8.1	877	724	109
BXEP-35E-435-09A-00-00-0	80	125	8.2	1.0	171	153	167
		250	8.6	2.2	330	294	153
		375	9.0	3.4	478	419	142
		500	9.3	4.7	614	534	132
		800	10.1	8.1	897	741	111
BXEP-40E-435-09A-00-00-0	80	125	8.2	1.0	174	156	170
		250	8.6	2.2	337	299	156
		375	9.0	3.4	488	428	144
		500	9.3	4.7	626	545	135
		800	10.1	8.1	915	755	113
BXEP-45E-435-09A-00-00-0	80	125	8.2	1.0	175	157	171
		250	8.6	2.2	338	301	157
		375	9.0	3.4	490	430	145
		500	9.3	4.7	629	547	135
		800	10.1	8.1	919	759	114

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7.5% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sn} = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXEP-50E-435-09A-00-00-0	80	125	8.2	1.0	175	157	171
		250	8.6	2.2	338	301	157
		375	9.0	3.4	490	430	145
		500	9.3	4.7	629	547	135
		800	10.1	8.1	919	759	114
BXEP-57E-435-09A-00-00-0	80	125	8.2	1.0	175	157	171
		250	8.6	2.2	338	301	157
		375	9.0	3.4	490	430	145
		500	9.3	4.7	629	547	135
		800	10.1	8.1	919	759	114
BXEP-65E-435-09A-00-00-0	80	125	8.2	1.0	174	156	169
		250	8.6	2.2	336	298	156
		375	9.0	3.4	486	426	144
		500	9.3	4.7	624	543	134
		800	10.1	8.1	912	753	113

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Electrical Characteristics

Table 4: Electrical Characteristics

Part Number ¹	Drive Current (mA)	Forward Voltage (V) ^{2,3}			Typical Temperature Coefficient of Forward Voltage $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ⁴ R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXEP-xxE-435-09A-00-00-0	500	8.5	9.3	10.2	-4.4	1.9

Notes for Table 4:

1. The last 7 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-00-0" denotes the full distribution of flux, forward voltage, and 7 SDCM color.
Example: BXEP-30E-435-09A-00-00-0 refers to the full distribution of flux, forward voltage, and color within a 3000K 7-step ANSI standard chromaticity region with a minimum of 80CRI, 4x3 die configuration, 4.7w power, 9.3V typical forward voltage.
2. Bridgelux maintains a tolerance of $\pm 0.1V$ on forward voltage measurements. Voltage minimum and maximum values at the nominal drive current are guaranteed by 100% test.
3. Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_{sp} = 25^\circ C$.
4. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 5: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	125°C
Storage Temperature	-40°C to +105°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current ²	800mA
Maximum Peak Pulsed Forward Current ¹	960mA
Maximum Reverse Voltage	Bridgelux LEDs are not designed to be driven in reverse bias
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 5:

1. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating LED SMD at maximum peak pulsed current specified. Maximum peak pulsed current indicate values where LED SMD can be driven without catastrophic failures.
2. The maximum drive current for LM80 test results is at 640mA.

Product Bin Definitions

Table 6 lists the standard photometric luminous flux bins for Bridgelux SMD 5050 LEDs. Although several bins are listed, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 6: Luminous Flux Bin Definitions at 500mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
A8	505	545	lm	$I_F=500\text{mA}$
A9	545	590		
B1	590	635		
B2	635	685		
B3	685	740		
B4	740	800		
B5	800	865		

Note for Table 6:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous flux measurements.

Table 7: Forward Voltage Bin Definition at 500mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
CD	8.5	9.0	V	$I_F=500\text{mA}$
CE	9.0	9.5		
CF	9.5	10.0		
CG	10.0	10.5		

Note for Table 7:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions



CCT	Color Space	Center Point		Major Axis	Minor Axis	Ellipse Rotation Angle	Color Bin
		X	Y				
2700K	3 SDCM	0.4578	0.4101	0.00810	0.00420	53.70	3
	5 SDCM	0.4578	0.4101	0.01350	0.00700	53.70	5
3000K	3 SDCM	0.4338	0.4030	0.00834	0.00408	53.22	3
	5 SDCM	0.4338	0.4030	0.01390	0.00680	53.22	5
3500K	3 SDCM	0.4103	0.3961	0.00927	0.00414	54.00	3
	5 SDCM	0.4103	0.3961	0.01545	0.00690	54.00	5
4000K	3 SDCM	0.3818	0.3797	0.00939	0.00402	53.72	3
	5 SDCM	0.3818	0.3797	0.01565	0.00670	53.72	5
4500K	3 SDCM	0.3611	0.3658	0.00756	0.00338	57.58	3
	5 SDCM	0.3611	0.3658	0.01260	0.00563	57.58	5
5000K	3 SDCM	0.3447	0.3553	0.00822	0.00354	59.62	3
	5 SDCM	0.3447	0.3553	0.01370	0.00590	59.62	5
5700K	3 SDCM	0.3287	0.3417	0.00746	0.00320	59.09	3
	5 SDCM	0.3287	0.3417	0.01243	0.00533	59.09	5
6500K	3 SDCM	0.3123	0.3282	0.00669	0.00285	58.57	3
	5 SDCM	0.3123	0.3282	0.01115	0.00475	58.57	5

Notes for Table 8:

1. Color binning at $T_{sp}=85^{\circ}\text{C}$
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.

Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (3 Color Bin Structure, hot-color targeted at $T_{sp}=85^{\circ}\text{C}$)

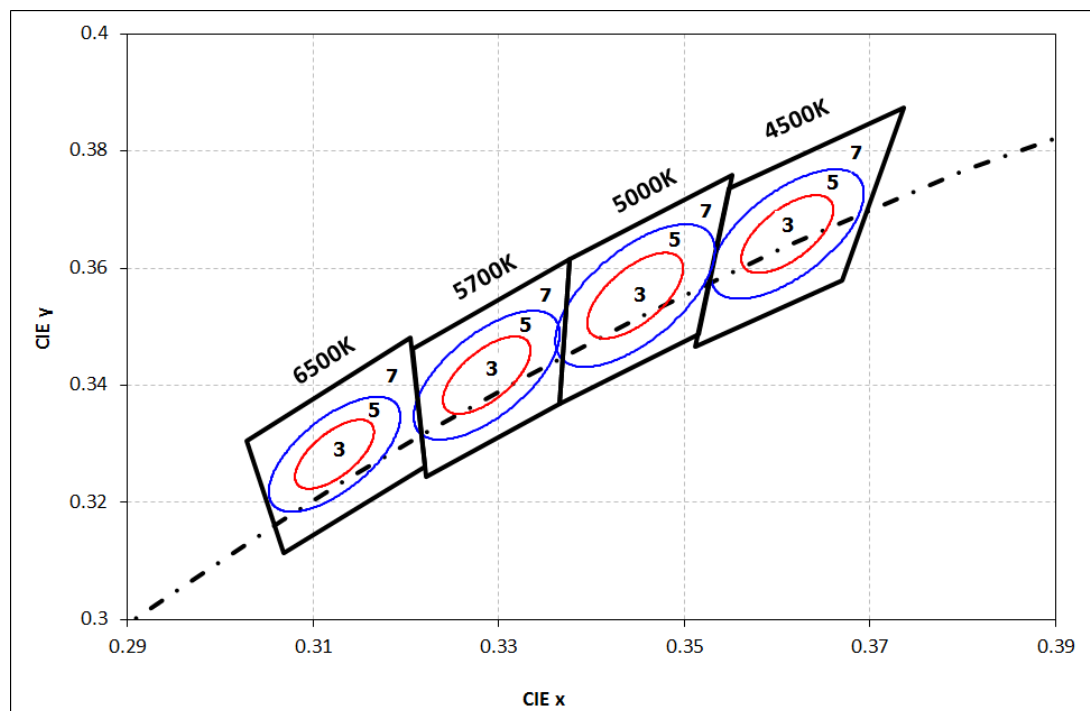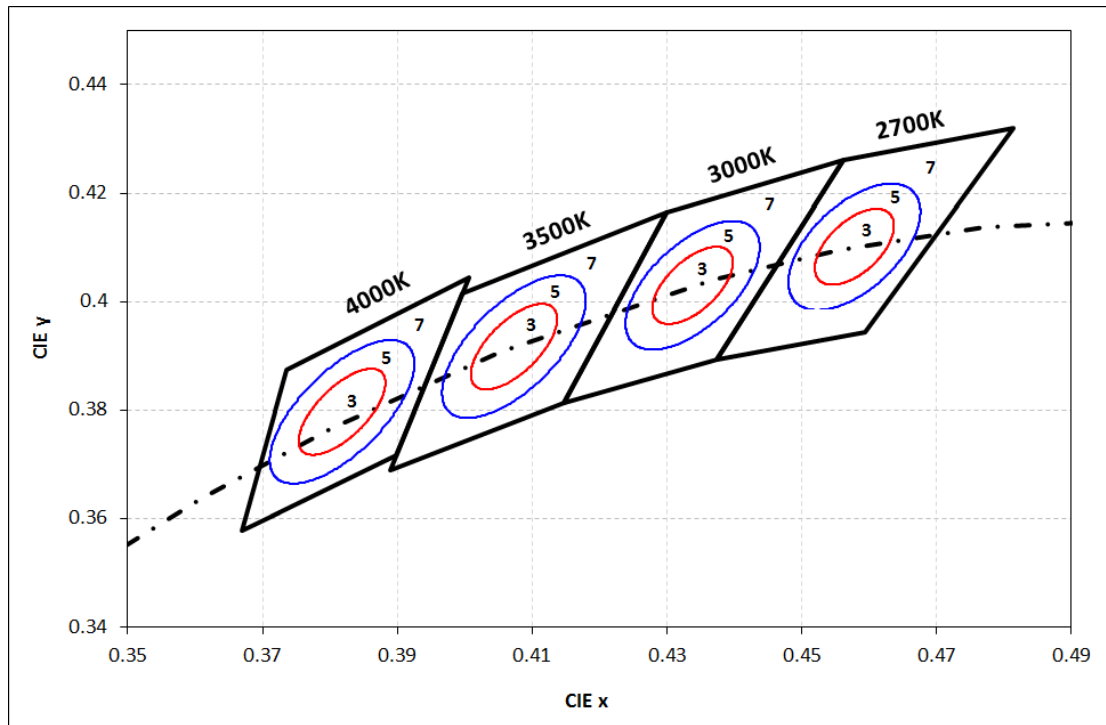

Performance Curves

Figure 2: Drive Current vs. Voltage ($T_{sp}=25^{\circ}\text{C}$)


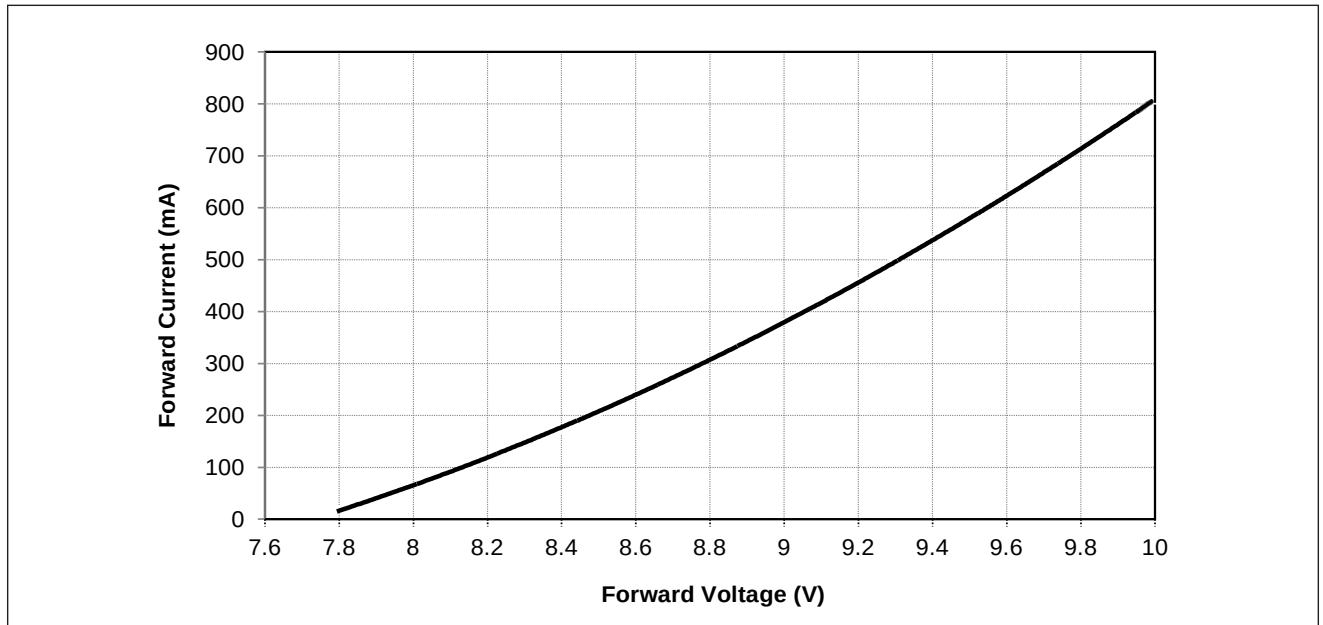


Figure 3: Typical Relative Luminous Flux vs. Drive Current ($T_{sp}=25^{\circ}\text{C}$)

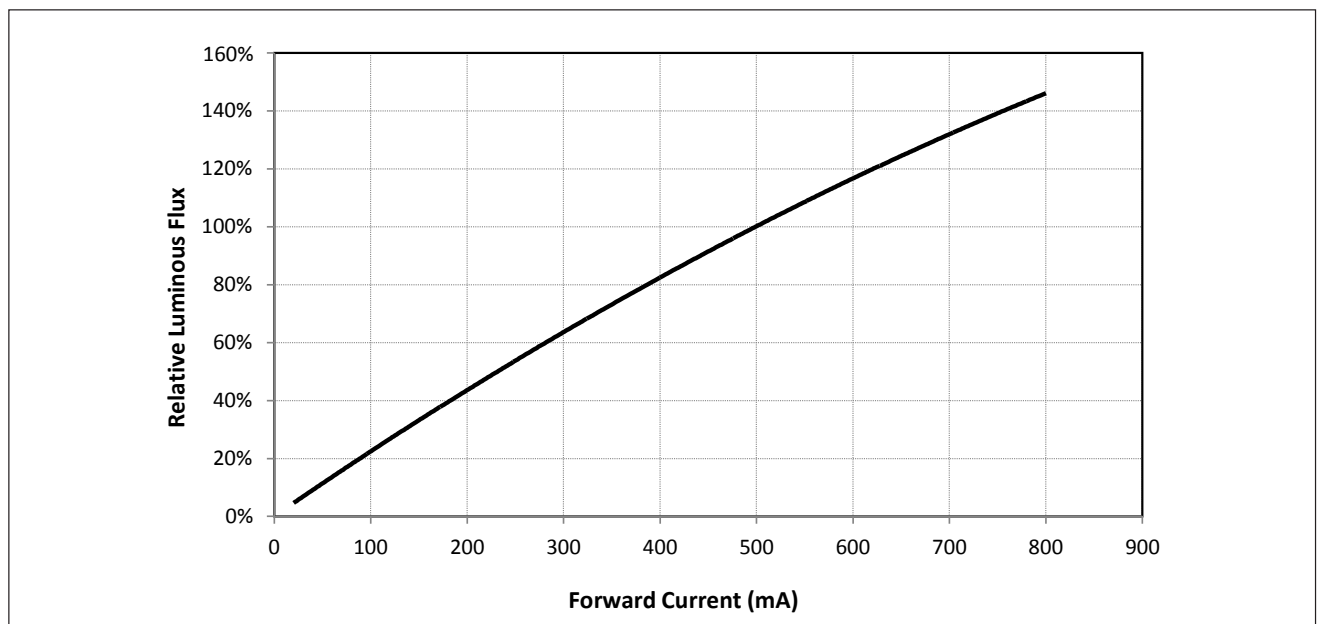

Note for Figure 3:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Typical Relative DC Flux vs. Solder Point Temperature


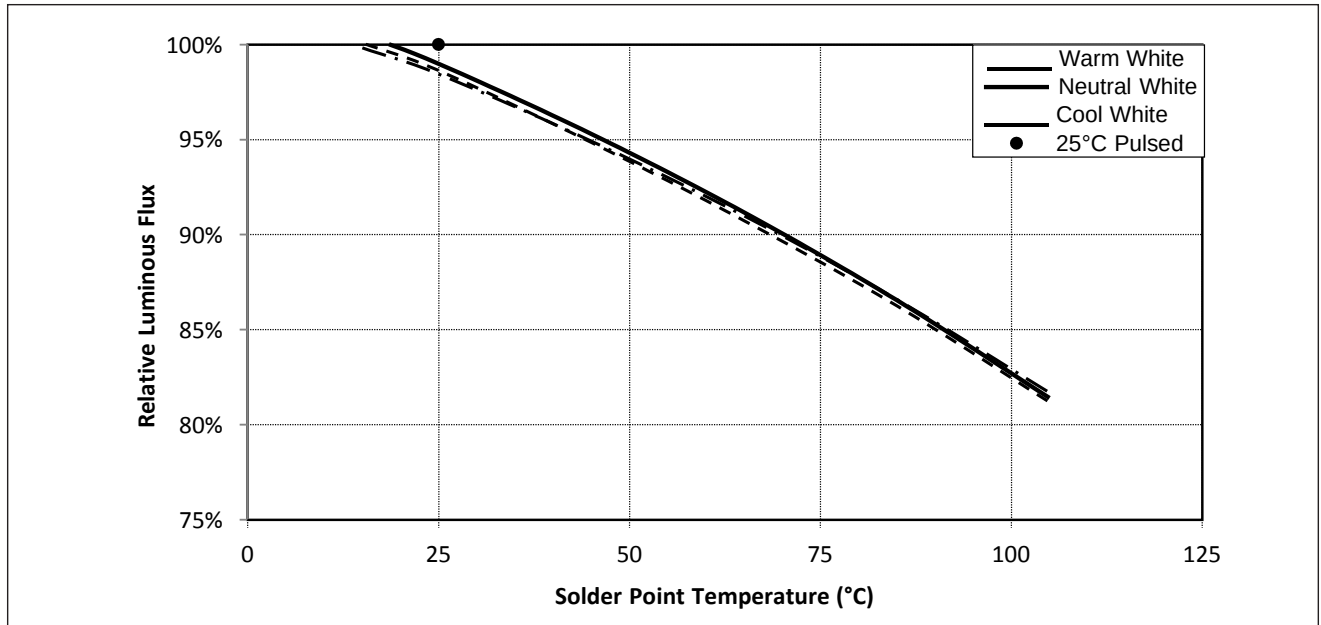


Figure 5: Typical DC ccx Shift vs. Solder Point Temperature

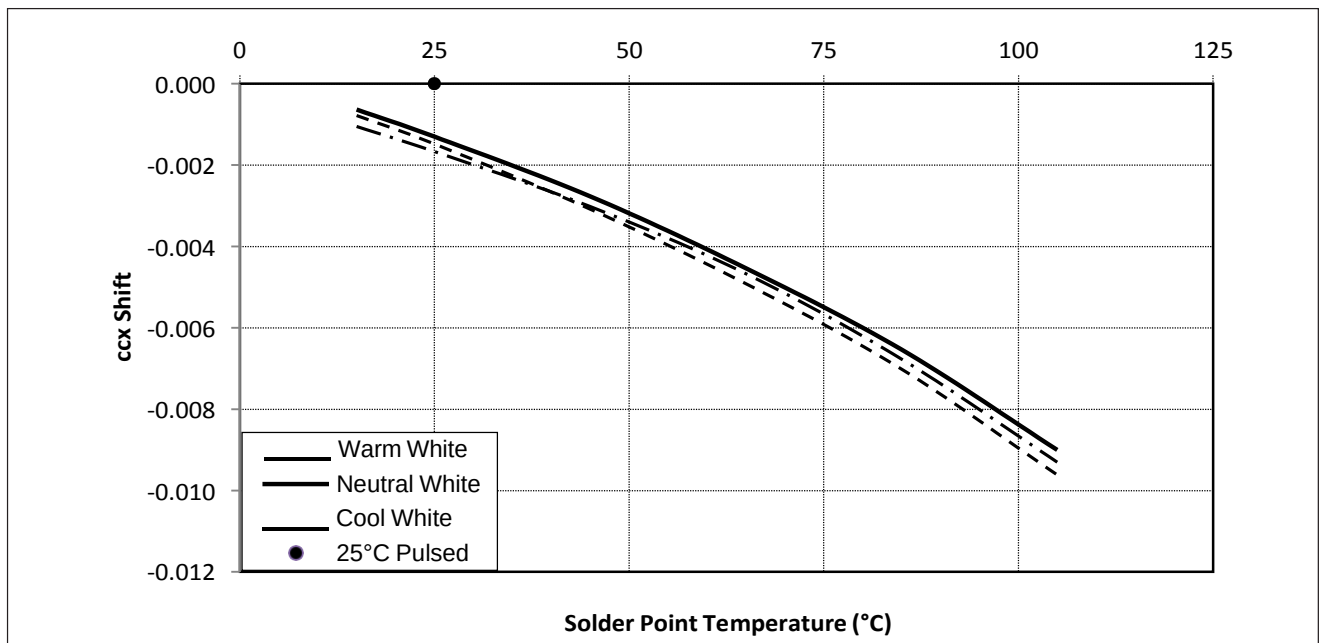


Notes for Figures 4 & 5:

1. Characteristics shown for warm white based on 3000K and 80 CRI.
2. Characteristics shown for neutral white based on 4000K and 80 CRI.
3. Characteristics shown for cool white based on 5000K and 80 CRI.
4. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves

Figure 6: Typical DC ccy Shift vs. Solder Point Temperature

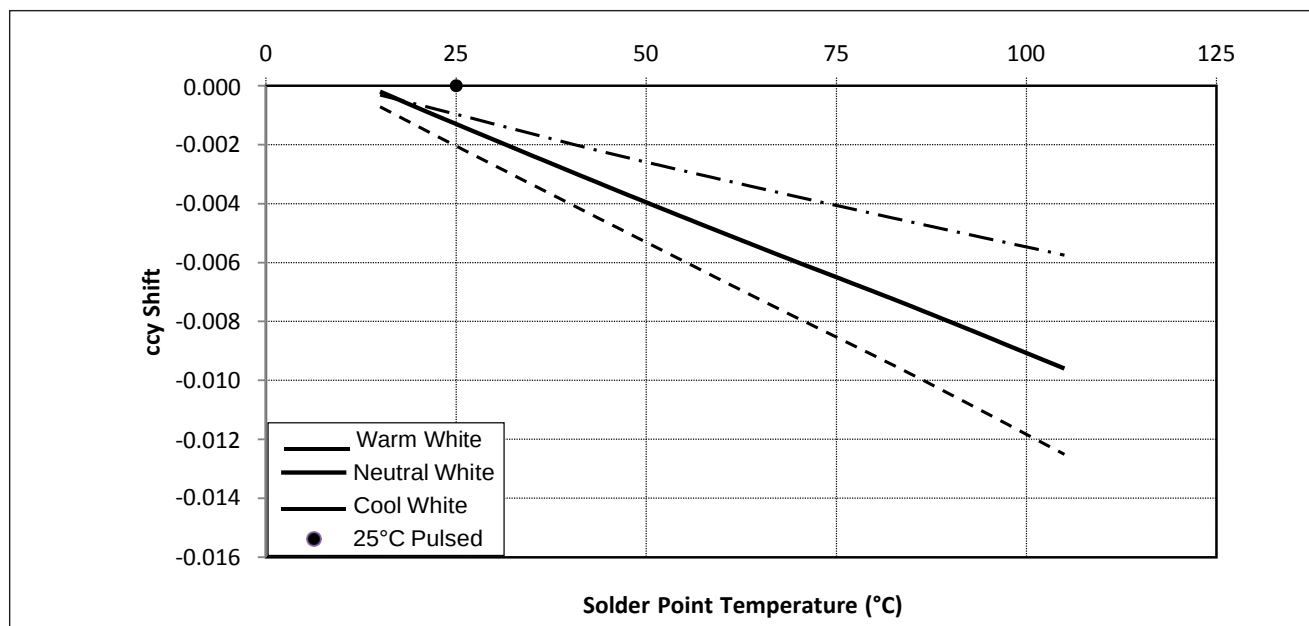


Notes for Figure 6:

1. Characteristics shown for warm white based on 3000K and 80 CRI.
2. Characteristics shown for neutral white based on 4000K and 80 CRI.
3. Characteristics shown for cool white based on 5000K and 80 CRI.
4. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Typical Radiation Pattern


Figure 7: Typical Spatial Radiation Pattern at 500mA, $T_{sp}=25^{\circ}\text{C}$

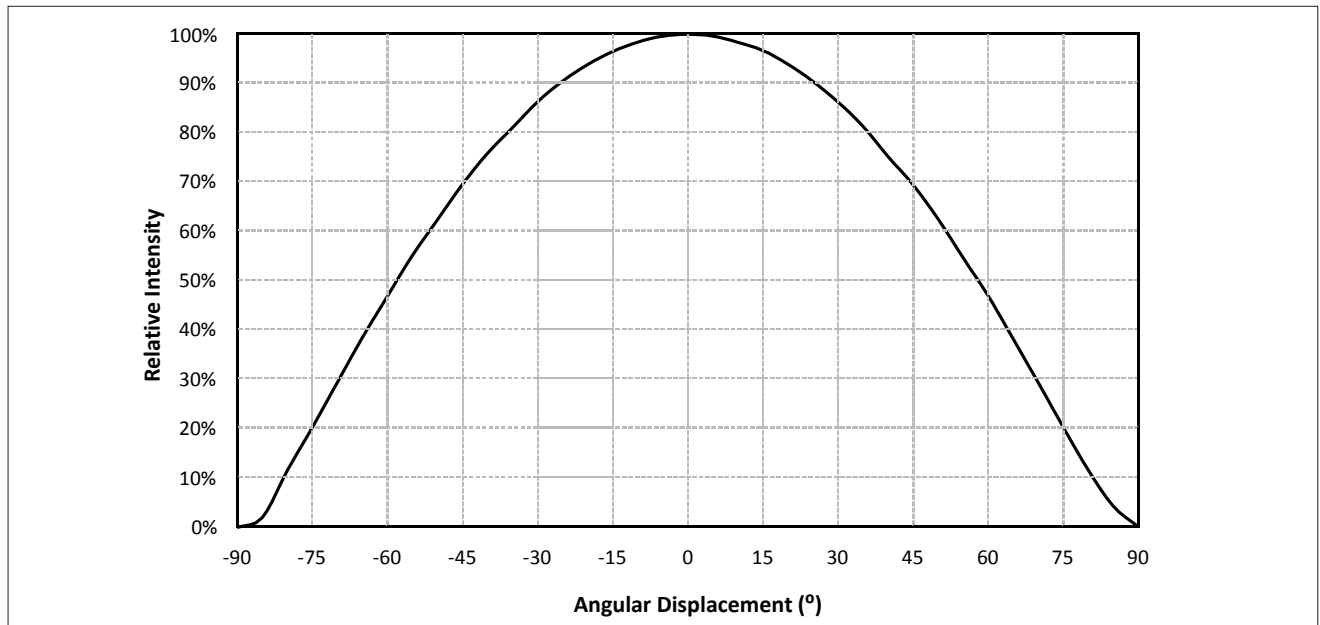

Notes for Figure 7:


1. Typical viewing angle is 116° .
2. The viewing angle is defined as the off axis angle from the centerline where luminous intensity (Iv) is $\frac{1}{2}$ of the peak value.

Figure 8: Typical Polar Radiation Pattern at 500mA, $T_{sp}=25^{\circ}\text{C}$

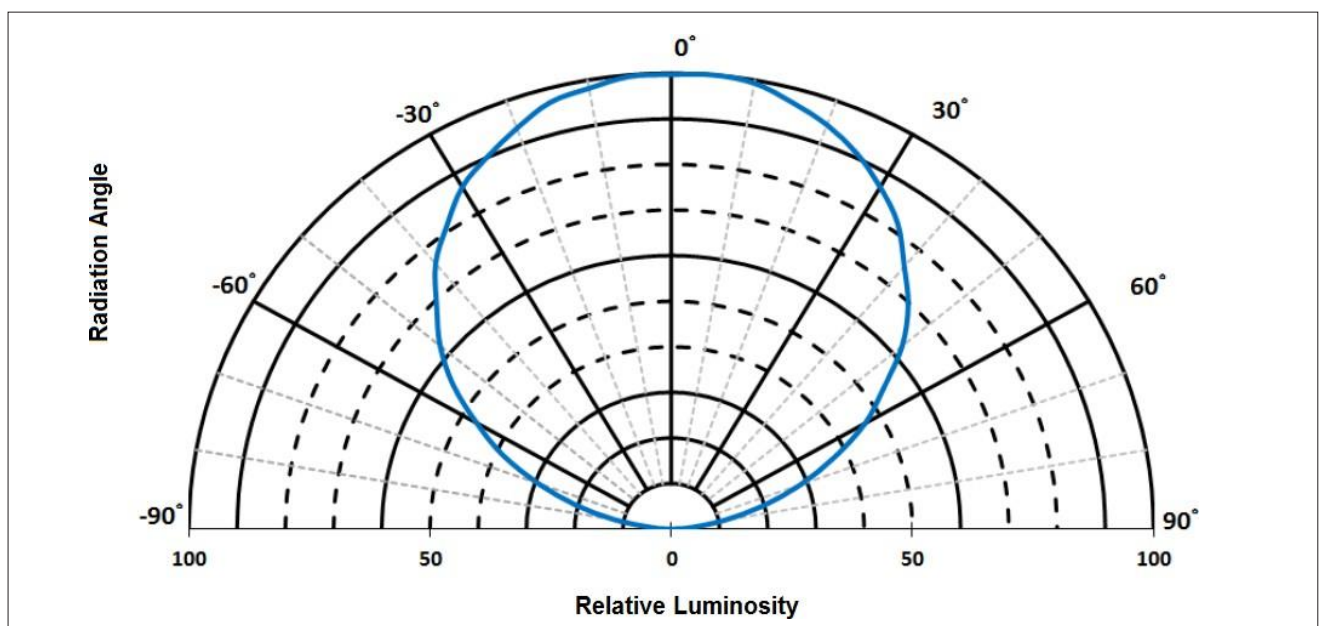

Typical Color Spectrum

Figure 9: Typical Color Spectrum

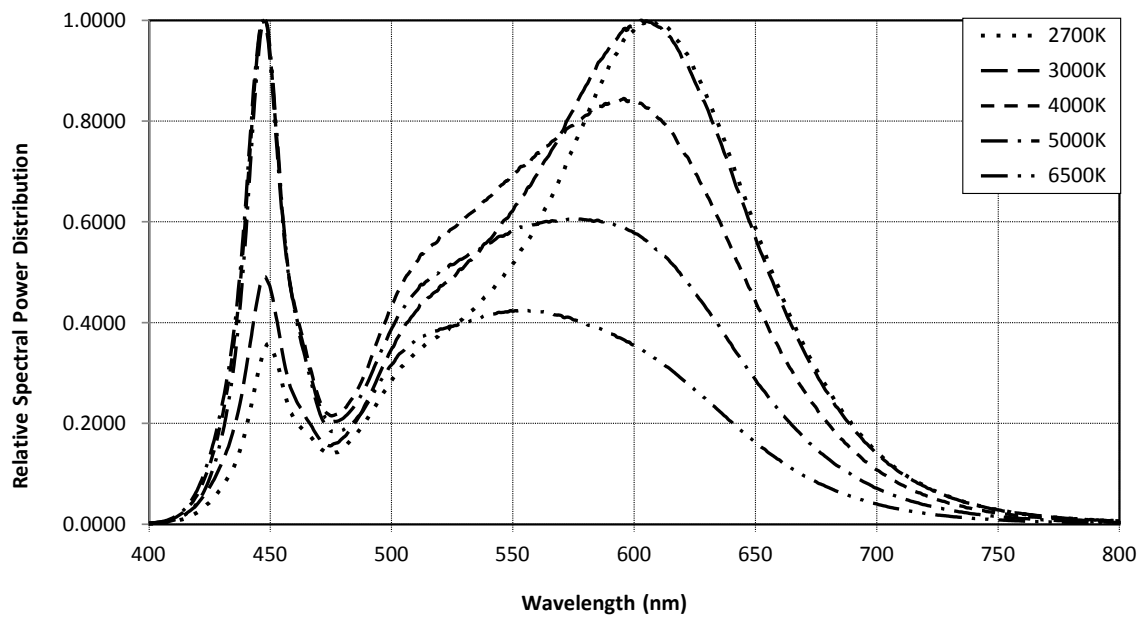


Notes for Figure 9:

1. Color spectra measured at nominal current for $T_{sp} = 25^{\circ}\text{C}$
2. Color spectra shown for warm white is 2700K and 80 CRI.
3. Color spectra shown for warm white is 3000K and 80 CRI.
4. Color spectra shown for neutral white is 4000K and 80 CRI.
5. Color spectra shown for cool white is 5000K and 80 CRI.
6. Color spectra shown for cool white is 6500K and 80 CRI.

Mechanical Dimensions


Figure 10: Drawing for SMD 5050

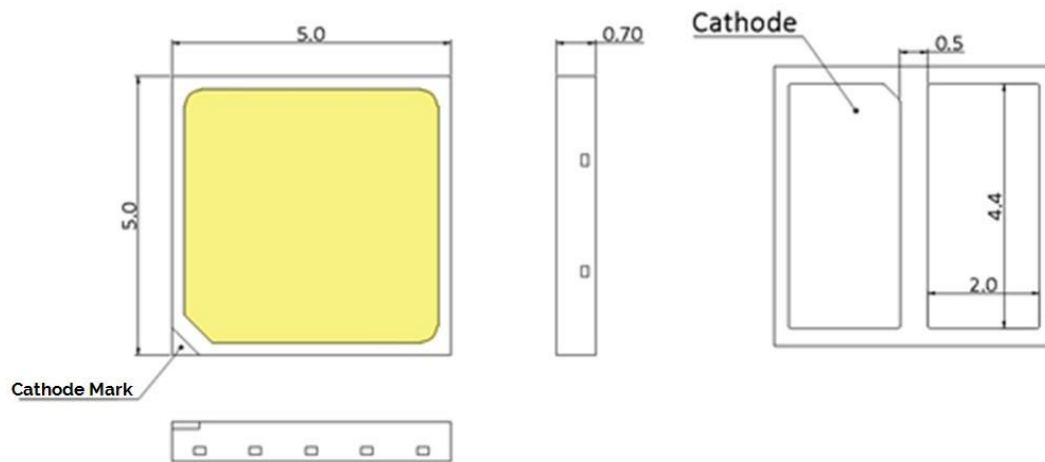

Notes for Figure 10:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are $\pm 0.10\text{mm}$.

Recommended PCB Soldering Pad Pattern

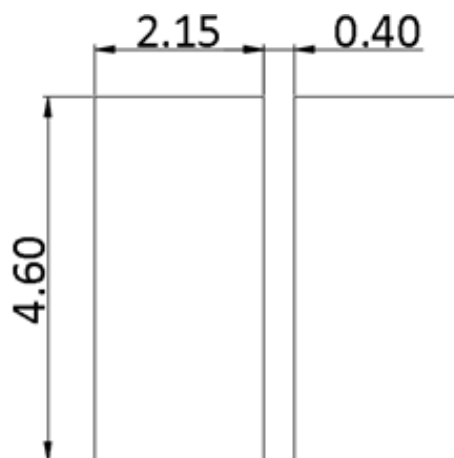

Reliability

Table 9: Reliability Test Items and Conditions

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture/Reflow Sensitivity	J-STD-020E	$T_{sd} = 260^{\circ}\text{C}$, 10sec, Precondition: 60°C , 60%RH, 168hr	-	3 reflows	0/22
2	Low Temperature Storage	JESD22-A119	$T_a = -40^{\circ}\text{C}$	-	1000 hours	0/22
3	High Temperature Storage	JESD22-A103D	$T_a = 105^{\circ}\text{C}$	-	1000 hours	0/22
4	Low Temperature Operating Life	JESD22-A108D	$T_a = -40^{\circ}\text{C}$	500mA	1000 hours	0/22
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{sp} = 85^{\circ}\text{C}$, RH=85%	500mA	1000 hours	0/22
6	High Temperature Operating Life	JESD22-A108D	$T_{sp} = 105^{\circ}\text{C}$	640mA	1000 hours	0/22
7	Power switching	IEC62717:2014	$T_a = 105^{\circ}\text{C}$ 30 sec on, 30 sec off	640mA	30000 cycles	0/22
8	Thermal Shock	JESD22-A106B	$T_a = -40^{\circ}\text{C} - 100^{\circ}\text{C}$; Dwell : 15min; Transfer: 10sec	-	200 cycles	0/22
9	Temperature Cycle	JESD22-A104E	$T_a = -40^{\circ}\text{C} - 100^{\circ}\text{C}$; Dwell at extreme temperature: 15min; Ramp rate $< 105^{\circ}\text{C}/\text{min}$	-	200 cycles	0/22
10	Electrostatic Discharge	JS-001-2012	HBM, 2KV, 1.5k Ω , 100pF, Alternately positive or negative	-	-	0/22

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	500mA	$\Delta Vf < 10\%$
Luminous Flux	Fv	500mA	$\Delta Fv < 30\%$
Chromaticity Coordinates	(x, y)	500mA	$\Delta u'v' < 0.007$

Notes for Table 9:

- Measurements are performed after allowing the LEDs to return to room temperature
- T_{sd} : reflow soldering temperature; T_a : ambient temperature


Reflowing Characteristics

Figure 11 : Reflow Profile

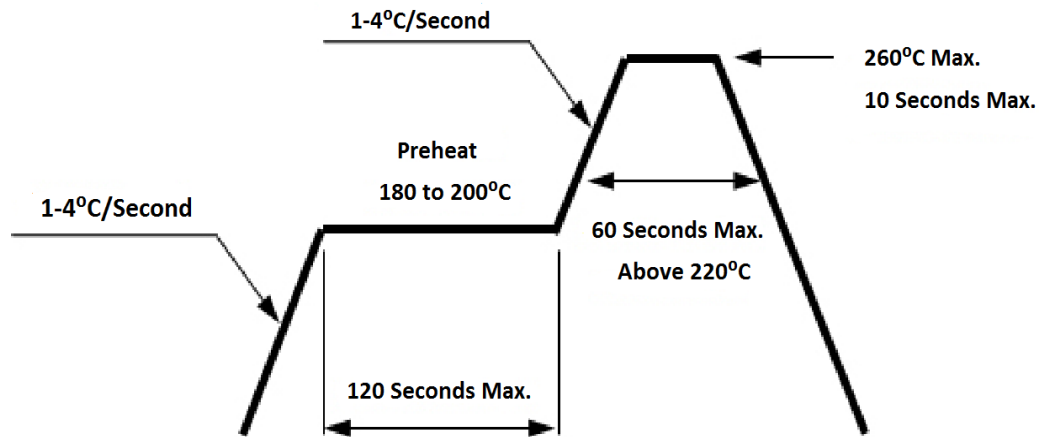

Profile Feature	Lead Free Assembly
Preheat: Temperature Range	180°C - 200°C
Preheat: Time (Maximum)	120 seconds
Peak Temperature	260°C
Soldering Time (Maximum)	10 seconds
Allowable Reflow Cycles	2

Figure 12 : Pick and Place

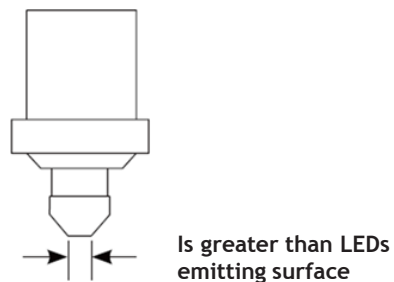


Note for Figure 12:

1. When using a pick and place machine, choose a nozzle that has a larger diameter than the LED's emitting surface. Using a Pick-and-Place nozzle with a smaller diameter than the size of the LEDs emitting surface will cause damage and may also cause the LED to not illuminate.

Packaging


Figure 13: Emitter Reel Drawings

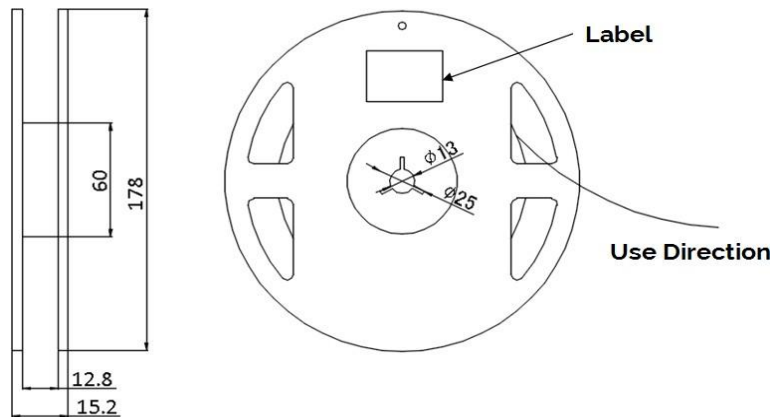

Note for Figure 13:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 14: Emitter Tape Drawings

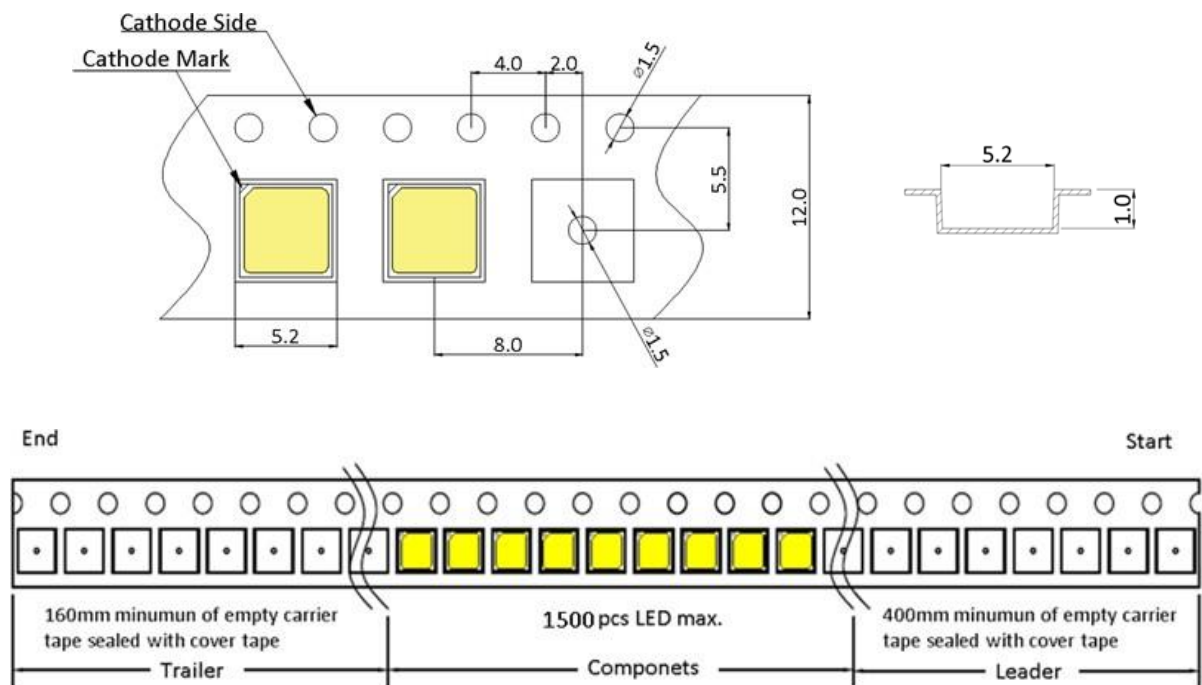


Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 15: Emitter Reel Packaging Drawings

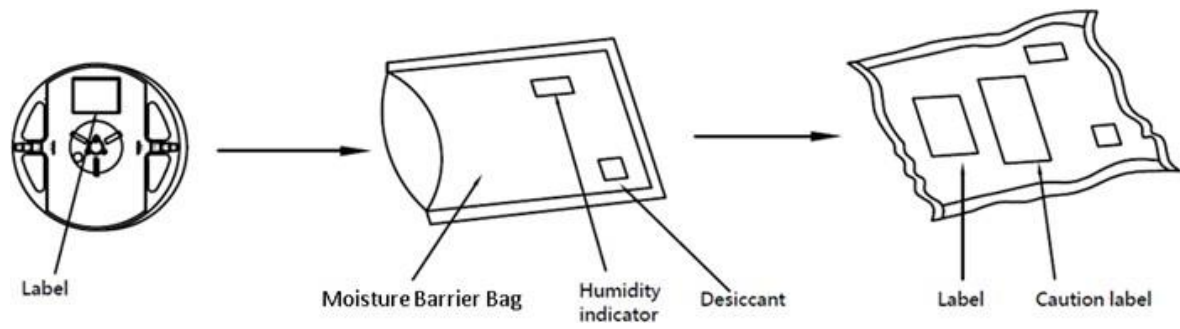

Note for Figure 15:
1. Drawings are not to scale.

Design Resources

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED emitter. Please consult Bridgelux Application Note AN51 for additional information.

CAUTION: EYE SAFETY

This SMD package emits visible light, that, under certain circumstances, could be harmful to the eye. Proper safeguards must be used.

CAUTION: RISK OF BURN

Do not touch the SMD LED emitter during operation. Allow the emitter to cool for a sufficient period of time before handling. The SMD LED emitter may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the emitter or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the emitter

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: We Build Light That Transforms

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
WeChat ID: BridgeluxInChina



101 Portola Avenue
Livermore, CA 94551
Tel (925) 583-8400
Fax (925) 583-8401
www.bridgelux.com

© 2016 Bridgelux, Inc. All rights reserved 2016. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.